

已确认此版本的所有图纸  
 客户签名: \_\_\_\_\_ 日期: \_\_\_\_\_





REV	DESCRIPTION	DATE
1.0	首次设计;	2023-05-10
1.0	修改LED灯数量;	2023-05-13

正视图

侧视图

背视图

PIN FUCTION	
PIN	SYMBOL
1	VLED-K
2	VLED-A
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	DCLK
31	DISP
32	HSYNC
33	VSYNC
34	NC(DE)
35	NC
36	GND
37	NC(XR)
38	NC(YD)
39	NC(XL)
40	NC(YU)

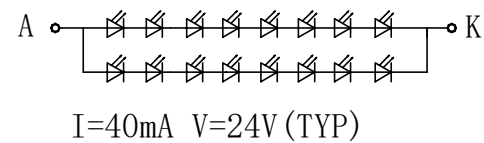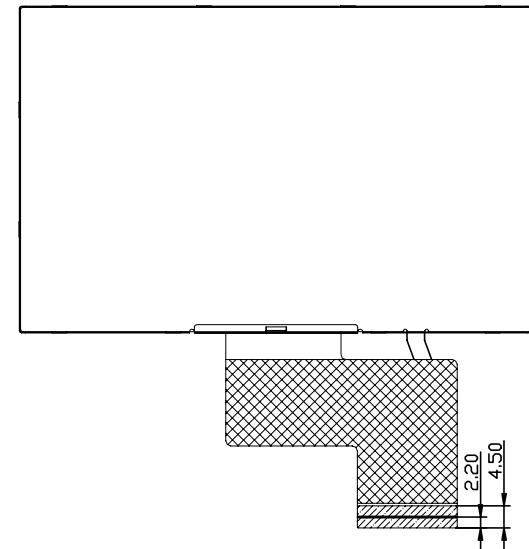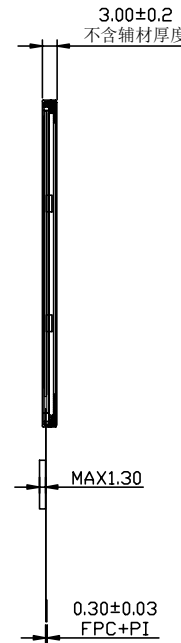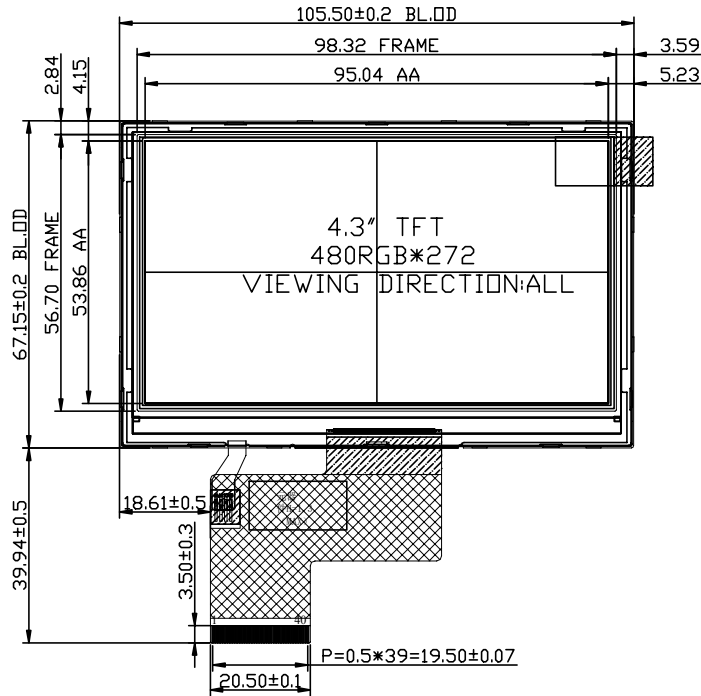

- Notes:
1. Display Mode: 16. 7M TFT/Normally Black
  2. Viewing Angle: ALL
  3. LCD Driver IC: SC7283
  4. Operating Temp: -30° C ~ +85° C
  5. Storage Temp: -30° C ~ +85° C
  6. \*:Critical Dimension, ( ):Reference Dimension
  7. Undefined Tolerance: ±0. 2
  8. Surface Luminance: 900 CD/M (MIN)
  9. Requirements on Environmental Protection: ROHS

Kingtech Group Co.,Ltd.	TITLE: ASSEMBLY	DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE:±0.2	
	PART NO.:	<b>PV043028H0140Y</b>	
	DRAWN BY:	DATE:	PROJECTION: OF
	CHECKED BY:	DATE:	SCALE: N.T.S UNIT: mm
	APPROVED BY:	DATE:	