
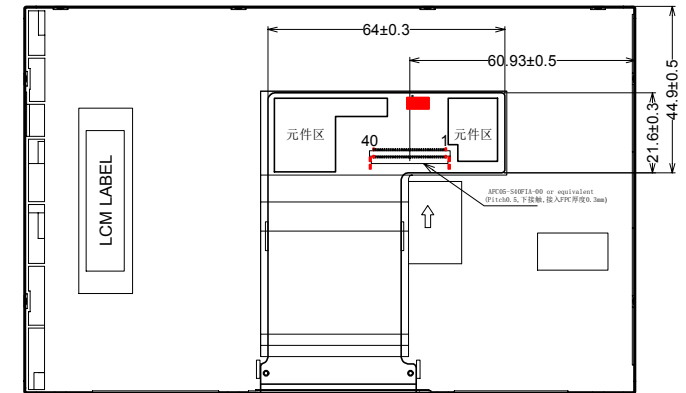
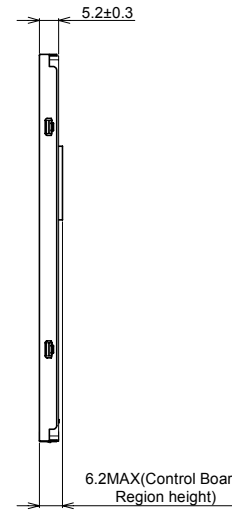


REV.	DESCRIPTION	REVISER	DATE
V0	NEW	Tom	20220610

FRONT VIEW

SIDE VIEW

REAR VIEW

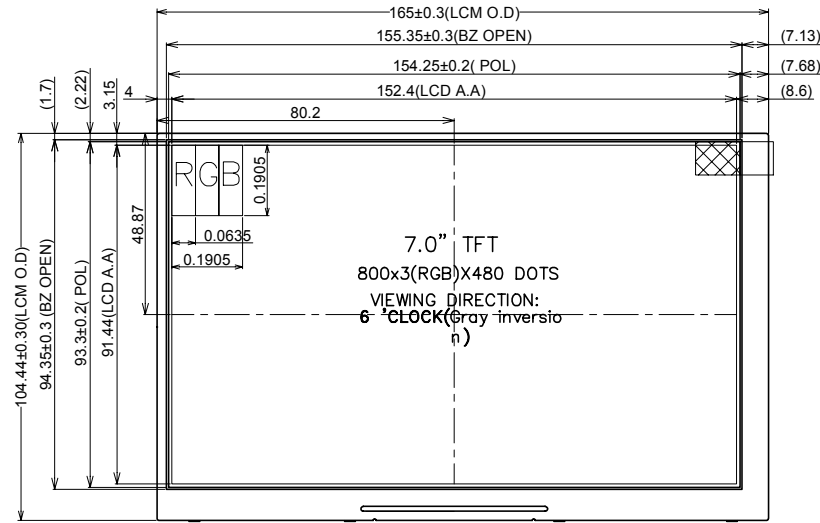

Pin No.	Symbol
1	VLED
2	VLED
3	BL_ADJ
4	LED_GND
5	LED_GND
6	VCC
7	VCC
8	MODE
9	DE
10	VS
11	HS
12	GND
13	B5
14	B4
15	B3
16	GND
17	B2
18	B1
19	B0
20	GND
21	G5
22	G4
23	G3
24	GND
25	G2
26	G1
27	G0
28	GND
29	R5
30	R4
31	R3
32	GND
33	R2
34	R1
35	R0
36	GND
37	DCLK
38	GND
39	L/R
40	U/D

NOTES:

1. DISPLAY TYPE: 7.0" TFT, TRANSMISSIVE, Normally White
2. VIEWING DIRECTION: 6 o'clock (Gray inversion)
3. Connector specification: AFC05-S40FIA-00 or equivalent
4. OPERATING TEMP: -20° C ~ +70° C
5. STORAGE TEMP: -30° C ~ +80° C
6. UNMARKER TOLERANCE: ±0.30
7. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

# Kingtech Group Co., Ltd.

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODEL NUMBER :		SHEET:	1 Of 1
DESIGN BY:				PV07043Y0140U		DRAWING DESCRIPTION:	LCM
CHECKED BY:							
APPROVED BY:					PROJECTION		