

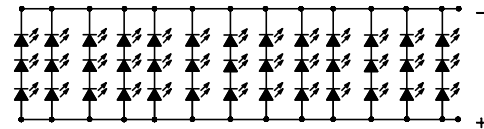


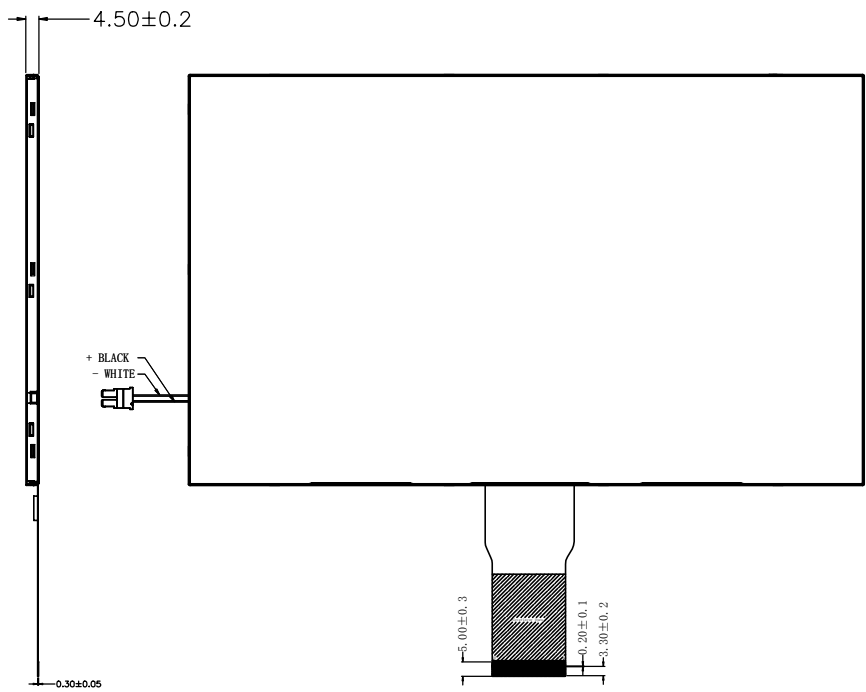

REV.	DESCRIPTION	REVISER	DATE
V0	NEW	ALECK	2021.04.13

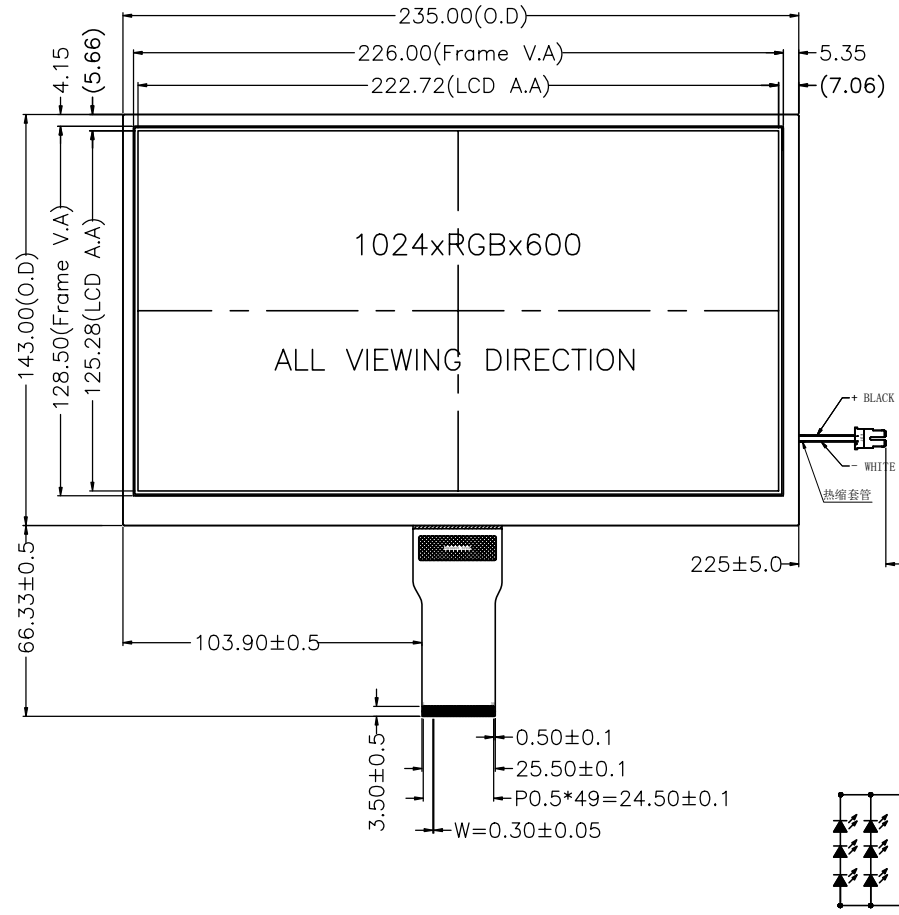

VF=9.6V (Typ), IF=260mA (Fix) 300cd/m² Min;350cd/m² Typ

PIN	ASSIGNMENT	PIN	ASSIGNMENT
1	LEDA(NC)	26	G1
2	LEDA(NC)	27	G0
3	LEDA(NC)	28	R7
4	LEDA(NC)	29	R6
5	GND	30	R5
6	VCOM	31	R4
7	DVDD	32	R3
8	MODE	33	R2
9	DE	34	R1
10	VS	35	R0
11	HS	36	GND
12	B7	37	DCLK
13	B6	38	GND
14	B5	39	L/R
15	B4	40	U/D
16	B3	41	VGH
17	B2	42	VGL
18	B1	43	AVDD
19	B0	44	RESET
20	C7	45	NC
21	C6	46	VCOM
22	C5	47	DITHB
23	C4	48	GND
24	C3	49	NC
25	C2	50	NC

- NOTES:
1. DISPLAY TYPE: 16.7M COLOR , 10.1" TFT
 2. VIEWING DIRECTION: 80/80/80/80
 3. POLARIZER MODE: TRANSMISSIVE/NEGATIVE
 4. OPERATING TEMP: -20° C ~ +70° C
 5. STORAGE TEMP: -30° C ~ +80° C
 6. UNMARKER TOLERANCE: ±0.20
 7. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

Kingtech Group Co., Ltd.

Unspecified Tolerance: ±0.20	UNITS: mm	DATE:	MODEL NUMBER :		SHEET: 1 Of 1
DESIGN BY:			PV101017LZR50Q		DRAWING DESCRUON: MODEL
CHECKED BY:				PROJECTION	
APPROVED BY:					