



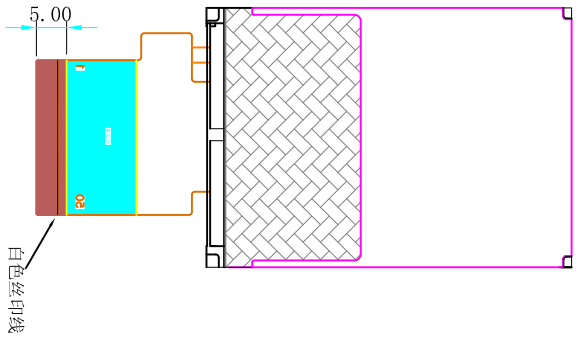

REV.	DESCRIPTION	REVISER	DATE
V0	NEW	RONG	20211227

All Pages Of This Edition Approved

Signature: _____ Date: _____

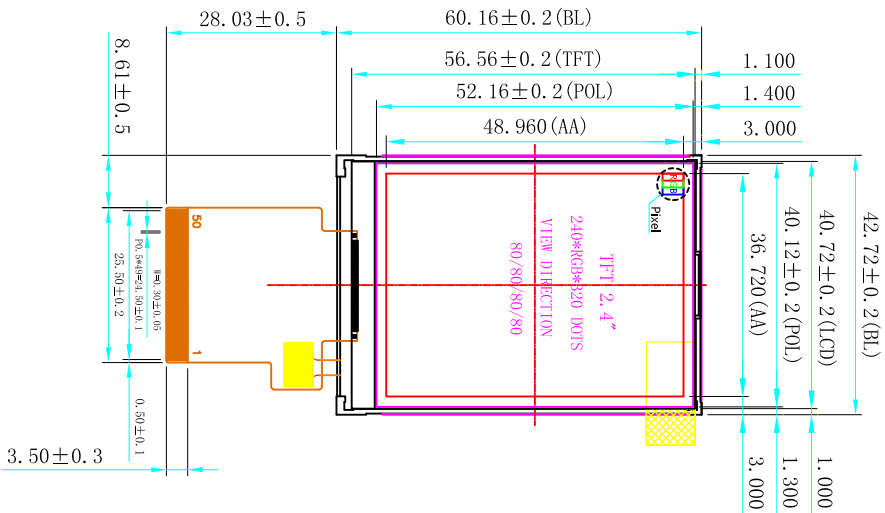


PIN	SYMBOL
1	LEBK
2	LEBN
3	NC
4	VCT
5	DDVC
6	TA0
7	TA1
8	TA2
9	TA3
10	GND
11	VS
12	HS
13	PC1K
14	DE
15	GND
16	G0
17	D1
18	D2
19	D3
20	D4
21	D5
22	D6
23	D7
24	D8
25	D9
26	D10
27	D11
28	D12
29	D13
30	D14
31	D15
32	D16
33	D17
34	NC
35	NC
36	NC
37	NC
38	NC
39	NC
40	RESET
41	R0
42	CS
43	WR
44	RX/SL
45	S01
46	NC
47	NC
48	NC
49	NC
50	NC

- NOTES:
1. DISPLAY TYPE: NORMALLY BLACK (Transflective)
 2. VIEWING DIRECTION: ALL (Wide Viewing)
 3. LCD DRIVE IC: ST7789
 4. RECOMMEND CONNECTOR: FH19S-50S-0.5SH
 5. OPERATING TEMP: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$
 6. STORAGE TEMP: $-30^{\circ}\text{C} \sim +80^{\circ}\text{C}$
 7. UNMARKER TOLERANCE: ± 0.20
 8. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS

Vf=3.2V

If=80mA



Kingtech Group Co., Ltd.

Unspecified Tolerance:	± 0.20	UNITS: mm	DATE:	MODEL NUMBER:	PROJECTION	SHEET:
DESIGN BY:	WELL			PV02415Y0140Q		1 OF 1
CHECKED BY:						
APPROVED BY:						
				NO. 0S-RDD-04-009		
						DRAWING DESCRIPTION:
						MODEL