
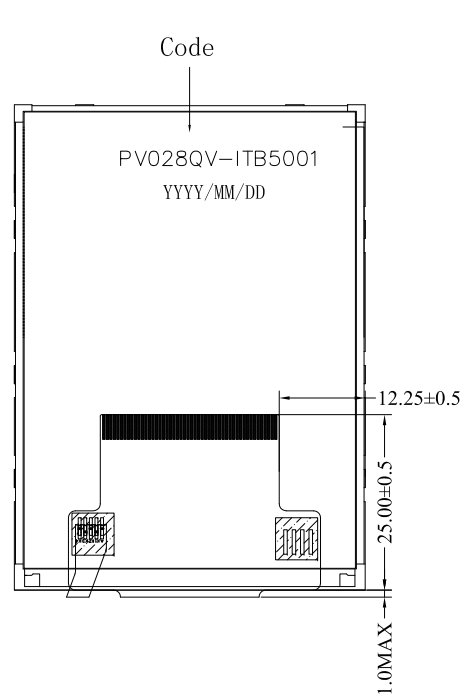
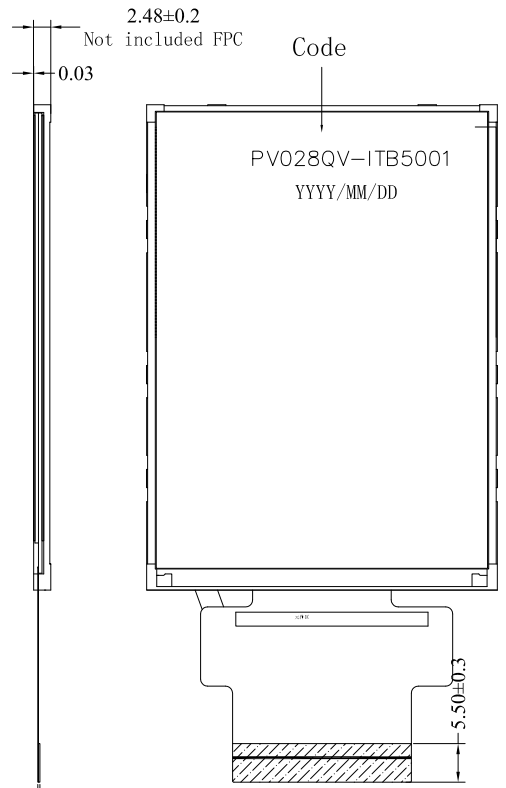



已确认此版本的所有图纸

客户签名: 日期:

REV	DESCRIPTION	DATE
1.0	First edition	2021-09-29

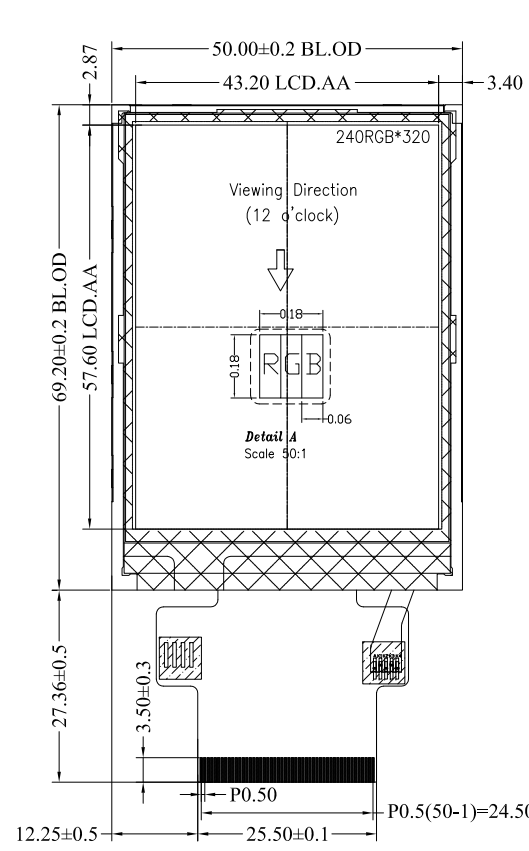

FPC Bending Sketch
FPC will be unfolded in package



4pcs LED If=80mA

PIN	SYMBOL
1	LEDK
2	LEDA
3	LEDA
4	LEDA
5	LEDA
6	IM0
7	IM1
8	IM2
9	IM3
10	/RESET
11	VSYNC
12	HSYNC
13	DOTCLK
14	DE
15	DB17
16	DB16
17	DB15
18	DB14
19	DB13
20	DB12
21	DB11
22	DB10
23	DB9
24	DB8
25	DB7
26	DB6
27	DB5
28	DB4
29	DB3
30	DB2
31	DB1
32	DB0
33	SDD
34	SDI
35	/RD
36	/WR_RS
37	RS_SCL
38	/CS
39	TE
40	IDVCC
41	IDVCC
42	VCI
43	GND
44	XR
45	YD
46	XL
47	YU
48	GND
49	GND
50	GND

Notes:

- 1.Display Mode:262K TFT/Normally White
- 2.Viewing Angle: 12 O'CLOCK
- 3.LCD Driver IC: ILI9341V
- 4.Operating Temp:-20°C ~ +70°C
- 5.Storage Temp:-30°C ~ +80°C
- 6.*:Critical Dimension,():Reference Dimension
- 7.Undefinition Tolerance:±0.2
- 8.Requirements on Environmental Protection:ROHS
- 9.Surface Luminance:600 CD/M²(MIN)

Kingtech Group Co.,Ltd	TITLE:	ASSEMBLY	DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE:±0.2	
	PART NO.:	PV028QV-ITB5001		
	DRAWN BY:		DATE:	PROJECTION:
	CHECKED BY:		DATE:	SCALE:N.T.S UNIT: mm
	APPROVED BY:		DATE:	SHEET: 1 OF 1