

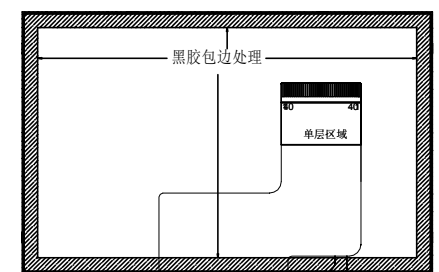
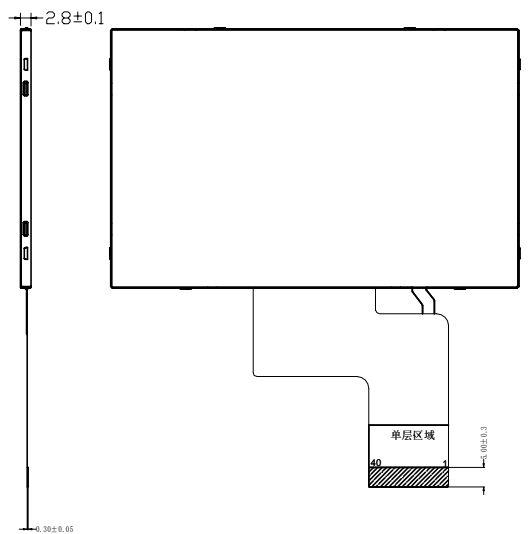


已确认此版本的所有图纸
 客户签名: _____ 日期: _____


REV	DESCRIPTION	DATE
1.0	首次设计	2021-5-27

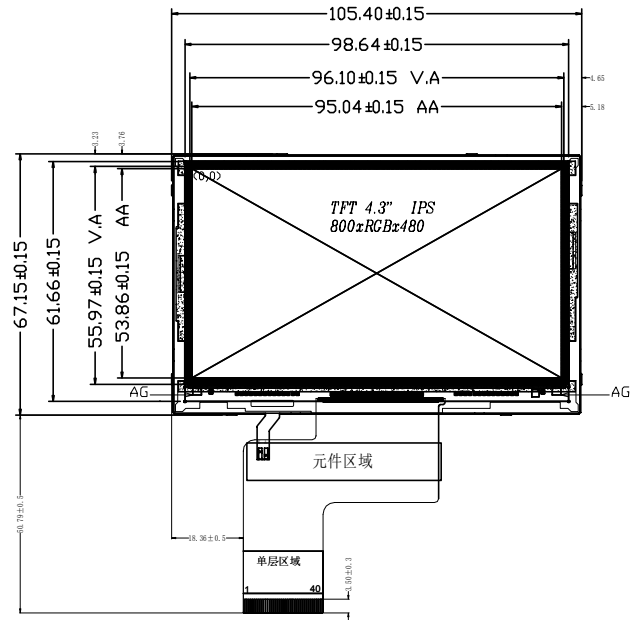

PIN	FUNCTION
1	VLED-
2	VLED+
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	PCLK
31	DISP
32	HSYNC
33	VSYNC
34	DE
35	NC
36	GND
37	NC
38	NC
39	NC
40	NC



Brightness: 1000nits

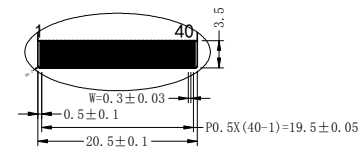

DETAIL A (2:1)

Specification:

- 1). Viewing angle: ALL
- 2). Display mode: 262K TFT/Transmissive/Normally BLACK
- 3). Operating temp: -20°C~+70°C
- 4). Storage temp: -30°C~+80°C
- 5). Backlight: 16 chip White LED
- 6). General Tolerance: ±0.2
- 7). ROHS Request

Kingtech Group Co.,Ltd.	TITLE:	ASSEMBLY	DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE:±0.2	
	PART NO.:	PV043018H0140T		
	DRAWN BY:		DATE:	
	CHECKED BY:		DATE:	
	APPROVED BY:		DATE:	
		PROJECTION:		
		SCALE:N.T.S	UNIT: mm	
		SHEET: 1 OF 1		