
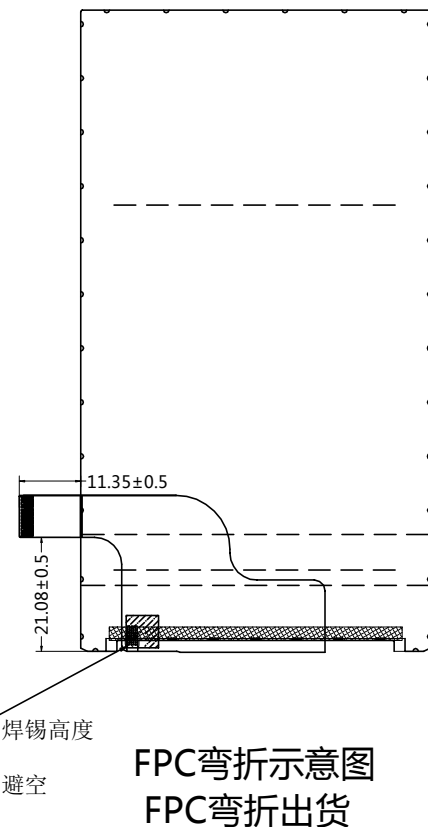
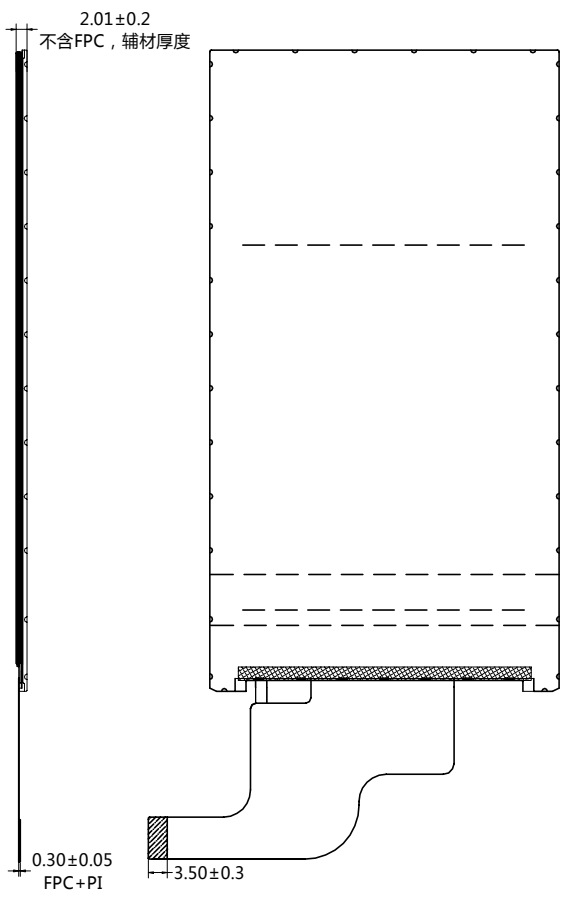


8 7 6 5 4 3 2 1

已确认此版本的所有图纸

客户签名: _____ 日期: _____


REV	DESCRIPTION	DATE
1.0	首次设计	2021-09-17

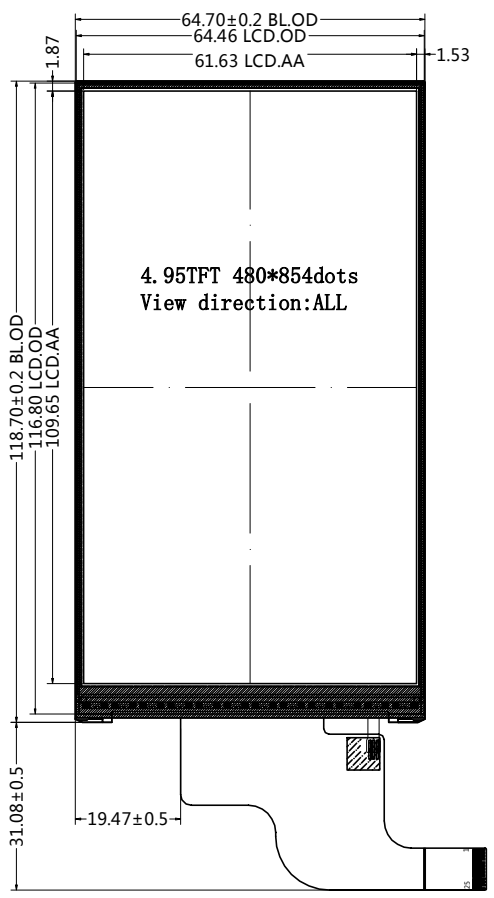

FPC弯折示意图
FPC弯折出货

No.	Name
1	GND
2	NC
3	NC
4	GND
5	MIPI_D1P
6	MIPI_D1N
7	GND
8	MIPI_CLKP
9	MIPI_CLKN
10	GND
11	MIPI_D0P
12	MIPI_D0N
13	GND
14	NC
15	NC
16	GND
17	TE
18	GND
19	LCD_ID(GND)
20	RESET
21	IOVCC
22	VCC
23	LEDK
24	LEDA
25	NC

- Specification:
- 1). Display mode: 16.7M TFT/Transmissive
 - 2). Viewing angle: ALL
 - 3). Operating temp.: -10°C~+60°C
Storage temp.: -20°C~+70°C
 - 4). IC: ST7701S
 - 5). Backlight: 12 chip White LED
 - 6). Dimensions with mark "*" are important, with mark "()" are referenced

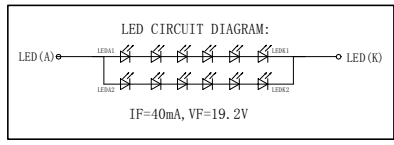

Kingtech Group Co.,Ltd.

TITLE:	ASSEMBLY	DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE:±0.2	
PART NO.:	PV05012HZ25P		
DRAWN BY:		DATE:	PROJECTION:
CHECKED BY:		DATE:	SCALE:N.T.S UNIT: mm
APPROVED BY:		DATE:	SHEET: 1 OF 1