




已确认此版本的所有图纸

客户签名: _____ 日期: _____

| REV | DESCRIPTION | DATE |
|-----|-------------|------------|
| 1.0 | 初次发行 | 2021-12-07 |
| 1.1 | 加长FPC; | 2021-12-08 |

接口定义

| No: | PIN NAME |
|-----|--------------|
| 1 | GND |
| 2 | NC |
| 3 | TP_VCC 2.85V |
| 4 | GND |
| 5 | TP_SCL 1.8V |
| 6 | TP_SDA 1.8V |
| 7 | GND |
| 8 | TP_INT 1.8V |
| 9 | TP_RST 1.8V |
| 10 | NC |
| 11 | NC |
| 12 | NC |
| 13 | NC |
| 14 | GND |
| 15 | VDD 2.85V |
| 16 | IOVDD 1.8V |
| 17 | GND |
| 18 | LCD-ID |
| 19 | RST |
| 20 | TE |
| 21 | GND |
| 22 | LCM_DATAP1 |
| 23 | LCM_DATAN1 |
| 24 | GND |
| 25 | CLKN |
| 26 | CLKP |
| 27 | GND |
| 28 | LCM_DATAPO |
| 29 | LCM_DATANO |
| 30 | GND |
| 31 | LCM_DATAP2 |
| 32 | LCM_DATAN2 |
| 33 | GND |
| 34 | LCM_DATAP3 |
| 35 | LCM_DATAN3 |
| 36 | GND |
| 37 | LEDK |
| 38 | LEDA |
| 39 | GND |

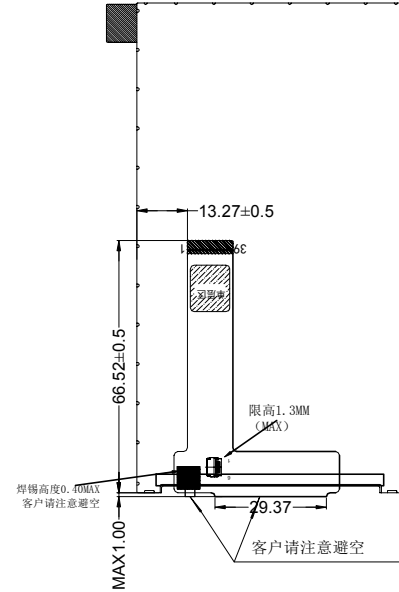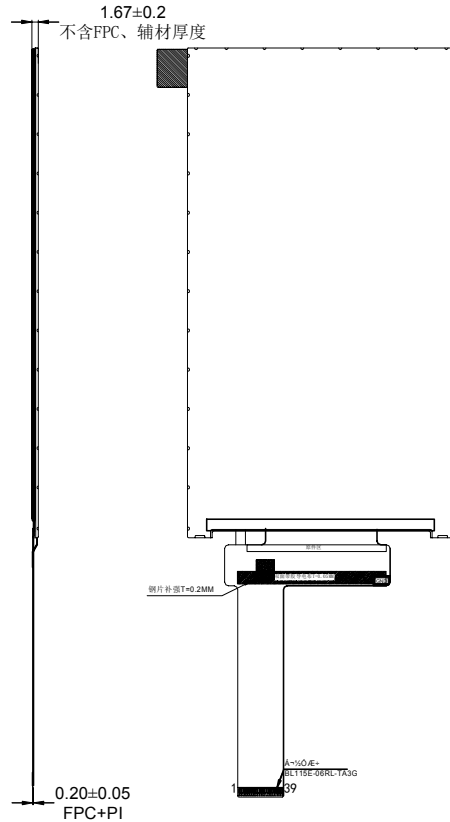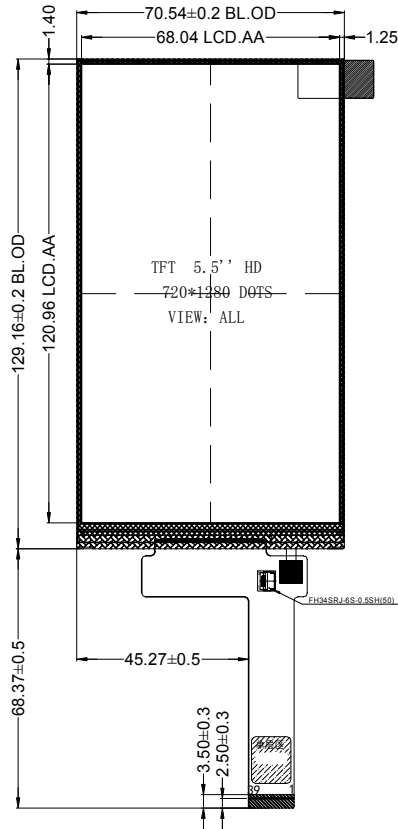


FPC弯折示意图
FPC弯折出货

TP接口定义

| No: | PIN NAME |
|-----|-----------|
| 1 | GND |
| 2 | RST 1.8V |
| 3 | INT 1.8V |
| 4 | SCL 1.8V |
| 5 | SDA 1.8V |
| 6 | VCC 2.85V |

Notes:

1. Display Mode: 262K TFT/Normally White
2. Viewing Angle: ALL
3. LCD Driver IC: ILI9881D;
4. Operating Temp: -10°C ~ +60°C
5. Storage Temp: -20°C ~ +70°C
6. *: Critical Dimension, (): Reference Dimension
7. Undefined Tolerance: ±0.2
8. Requirements on Environmental Protection: ROHS



| | | | | | |
|--------------------------|-------------|---------------|--|---------------|-----------------------|
| Kingtech Group Co., Ltd. | TITLE: | ASSEMBLY | DO NOT SCALE THIS DRAWING, GENERAL TOLERANCE: ±0.2 | | |
| | PART NO.: | PV05507H0139G | | | |
| | DRAWN BY: | | DATE: | | PROJECTION: |
| | CHECKED BY: | | DATE: | | SCALE: N.T.S UNIT: mm |
| APPROVED BY: | | DATE: | | SHEET: 1 OF 1 | |